



Aachen, den 14.12.2007

PRODIS-GUT License

to use the label of

Gemeinschaft umweltfreundlicher Teppichboden e.V.

in combination with the label of the related product information system,

GUT-PRODIS-Label

for the article: **ALTONA UX+**

of the manufacturer: **Balta Industries NV/Division ITC**

PRODIS-GUT
license number: **DBC040FB**

Basic product description:

Type of manufacture: pile carpet acc. EN 1307 - tufted
Type of surface: cut pile - plain
100% PA6
Type of backing: textile backing - needled - man-made fibres

The above article fulfills the GUT requirements (compliance with thresholds and ban of use regarding VOC emissions, harmful substances and odor) as well as the declared use characteristics in the pictograms. On behalf of "Gemeinschaft umweltfreundlicher Teppichboden e.V." the license is granted.

Information about the current validity of the license as well as information on the GUT criteria, use and additional characteristics, or related Environmental Product Declarations (EPD), can be found on the related product page at www.gut-ev.de or www.pro-dis.info. Please search with the indicated PRODIS-GUT license number or simply scan the QR code, directly linked with the appropriate product page.



GUT Safety Code

This license was issued electronically and requires no further signature.

Gemeinschaft umweltfreundlicher Teppichboden e.V.,
D-52068 Aachen, Schönebergstrasse 2




GUT Product Test

Criteria and limit values

The GUT Signet can be granted only to members of Gemeinschaft umwelt-freundlicher Teppichböden e.V.

(Only manufacturers of textile floorcoverings can become members)

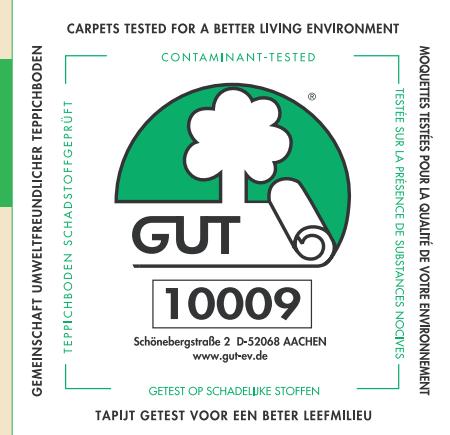

The use of the substances listed below is either forbidden or GUT has specified limit values for the substances that must not be exceeded.

ORGANIC CARRIERS (DYEING ACCELERANTS)

GUT test procedure No. 1

There is a ban on the use of the carriers listed.

Di-, tri-, tetra-, penta- and hexachlorobenzenes; di-, tri-, tetra- and pentachlorotoluenes

AZODYES

GUT test procedure No. 2

There is a ban on the use of dyes and pigments which, under reductive conditions, release carcinogenic amines.

4-aminodiphenyl, benzidine, 4-chloro-o-toluidine, 2-naphthylamine, o-amino-azotoluene, 2-amino-4-nitrotoluene, p-chloroaniline, 2,4-diaminoanisol, 4,4'-diaminodiphenylmethane, 3,3'-dichlorobenzidine, 3,3'-dimethoxybenzidine, 3,3'-dimethylbenzidine, 3,3'-dimethyl-4,4'-diaminodiphenylmethane, p-cresidine, 4,4'-methylene-bis-(2-chloroaniline), 4,4'-oxydianiline, 4,4'-thiodianiline, o-toluidine, 2,4-diaminotoluene, 2,4,5-trimethylaniline, o-anisidine, p-amino-azobenzene*, 2,4-xylidine, 2,6-xylidine, 6-amino-2-ethoxynaphthaline**, 4-amino-3-fluorophenol**
(*not identifiable, **special procedure required)

DISPERSE DYES

GUT test procedure No. 3

There is a ban on the use of the dyes listed, which are classified as "allergising".

C.I. Disperse Blue 1, -3, -7, -26, -35, -102, -106 and -124, C.I. Disperse Orange 1, -3, -37/76, C.I. Disperse Red 1, -11 and -17, C.I. Disperse Yellow 1, -3, -9, -39 and -49

CARCINOGENIC DYES

GUT test procedure No. 4

There is a ban on the use of the dyes listed, which are classified as "carcinogenic".

C.I. Acid Red 26, C.I. Basic Red 9, C.I. Direct Red 28, C.I. Direct Blue 6, C.I. Disperse Blue 1, C.I. Disperse Yellow 3, C.I. Direct Black 38

HEAVY METALS

GUT test procedure No. 5

Dyes and pigments containing the listed heavy metals as ingredients of the dyeing component must not be used to dye the pile material. The limit value for the total heavy metal content of a fitted carpet is 100 mg/kg.

Pb (lead), Cd (cadmium), Hg (mercury), Cr (chromium total) or Cr(VI)

FLAME RETARDANTS

GUT test procedure No. 6

There is a ban on the use of the halogenous and phosphorous flame retardants listed.

PBB, TRIS, TEPA, SCCPs, PeBDE (pentabromodiphenylether)

ACTIVE BIOCIDAL SUBSTANCES

GUT test procedure No. 7

For the biocides listed that may be contained as active substances in respective formulations there is either a ban on their use or a limit value was specified for the respective active substance or group of active substances.

- 1) There is a ban on the use of products containing **TBT**.
- 2) The limit value for the **chlorophenols**, pentachlorophenol and tetrachlorophenol (PCP and TeCP), is 0.1 mg/kg.
- 3) For **orthophenylphenol** (OPP), there is a limit value of 1 mg/kg.
- 4) For the **chlororganic pesticides** listed, there is a limit value of 0.04 mg/kg for each individual substance and of 1 mg/kg for the sum of all components, respectively.
o,p' and p,p' -DDE, -DDD and -DDT, α , β , δ , ϵ -hexachlorocyclohexane, aldrine, dieldrine, endrine, heptachlor, heptachloroepoxide, hexachlorobenzene, lindane, methoxychlor, mirex, toxaphene, *- α -and , β -endosulphane
- 5) For the **phosphororganic pesticides** listed, there is a limit value of 0.04 mg/kg for each individual substance and of 1 mg/kg for the sum of all components, respectively.
Diazinon, dichlorofenthion, dichlorophos**, malathion**, parathion-ethyl, parathion-methyl*, trifluralin (*special procedures required, **other identification limits).
- 6) For the **herbicides**, 2,4,5-T and 2,4-D, there is a limit value of 0.04 mg/kg for each individual substance and of 1 mg/kg for the sum of all components, respectively.
- 7) Except for permethrine, there is a ban on the use of all **pyrethroids** for the protection of wool against moths and beetles.
- 8) As moth- and beetle-proofing agent for the sole finishing of woollen fitted carpets, **permethrine** may be used up to a maximum limit of 210 mg/kg. Application must be conducted in compliance with a prescribed procedure.

EMISSIONS FROM TEXTILE FLOORCOVERINGS

GUT test procedure No. 8

Volatile organic components from textile floorcoverings are determined in compliance with the test-chamber process. The following limit values are specified for the components listed.

TVOC	300 $\mu\text{g}/\text{m}^3$	Test chamber method (EN 13419; 1+2; ISO 16000). The test is performed 72h after $t = 0$. For calculation and evaluation of the R-value, the actual LCI-Value List as published by AgBB* is used.
VOC without LCI	100 $\mu\text{g}/\text{m}^3$	
R-Value	≤ 1	
SVOC (C_{16} to C_{22})	30 $\mu\text{g}/\text{m}^3$	
Cancerogenic Substances (EU-list Class 1 a. 2)	n.n.	

* Ausschuss zur gesundheitlichen Bewertung von Baumaterialien

ODOUR

GUT test procedure No. 9

The material tested should only have the low-intensity odour typical of a new product.

The test mark following appraisal by a team of 7 persons must be a value < 4.

REQUIREMENTS ON LATICES

GUT test procedure No. 10

The latices used for coating must meet the following requirements on the residual monomer content.

For the individual substances styrene and 4-PCH, the limit value is 200 mg/kg of latex, and for ethylbenzene and 4-VCH, the limit value for each is 50 mg/kg of latex.

The limit value of the sum for all 4 components is 400 mg/kg of latex.

For the manufacture of foam coatings, there is a ban on the use of the vulcanisation accelerator Zn-diethyldithiocarbamate (ZDEC).



DECLARATION OF PERFORMANCE

DOP: 1011#IF0ACV

1. Unique identification code of the product-type:

1011#IF0ACV

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

ALTONA UX+ - Textiler Bodenbelag - pile carpet acc. EN 1307

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

For use as floor covering in buildings (see EN 14041) according to the manufacturer's specifications.

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):

Balta Industries NV/Division ITC - Kanegemstraat - B - 8700 Tielt



5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2):

- - -

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

System 1

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:

Name of notified certification body that performed the initial inspection of the manufacturing plant and of factory production control, continuous surveillance, assessment and evaluation of factory production control and issued the certificate of constancy of performance.

Centexbel; Wetenschappelijk en technisch centrum voor de Belgische
textielnijverheid
Technologiepark 7

Notified Body

0493-CPD-0037

certificate of constancy of performance

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

not applicable

9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire		EN 14041:2004/AC:2006
Content of Pentachlorophenol		EN 14041:2004/AC:2006
Formaldehyd Emissions		EN 14041:2004/AC:2006
Slip resistance		EN 14041:2004/AC:2006
Electrical behavior (dissipative)	NPD	EN 14041:2004/AC:2006
Electrical behavior (conductive)	NPD	EN 14041:2004/AC:2006
Electrical behavior (antistatic)		EN 14041:2004/AC:2006
Thermal conductivity [W/mK]	0.057	EN 14041:2004/AC:2006
Water-tightness	NPD	EN 14041:2004/AC:2006

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:


Luc Nelis, Production Manager

(name and function)

08.07.2013, Tielt

(place and date of issue)

(signature)



Dhr. Luc Nelis
BALTA INDUSTRIES NV - AFDELING ITC
Kanegemstraat 15
8700 TIELT

Your notice of

Your reference

our reference

PW/10247

date

2010-11-16

Certification Report Nr. 10/10247

Modification of certification report 09/7015 dd. 2009-07-31

1. Description of the flooring:

Product group: Tufted broadloom carpet - FR
100% polyamide
Needled fleece backing
Total mass: 1550 g/m² - 1830 g/m²
Effective pile thickness: 3.5 mm - 4.2 mm
Certificate of conformity: 0493-CPD-0037

2. Executed tests:

European Fire classification in accordance with EN 13501-1 (2002)		
Class	EN ISO 11925-2 (15 s surface flame attack) or EN 14041 (2004)	EN ISO 9239-1 (test duration = 30 min)
C _{fl}	E _{fl}	heat flux ≥ 4,5 kW/m ²

3. Conclusion:

Referring to the means of control and the test results, the before mentioned product group can be classified as follows:

glued on a non-combustible substrate

C_{fl} - s1

This certification report runs to 2 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.

The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.

Centexbel is recognized as notified body 0493 for the European Construction Products directive and the European directive for personal protective equipment

CENTEXBEL GENT
Technologiepark 7
BE-9052 Zwijnaarde (Gent)
Tel. +32 9 220 41 51
Fax +32 9 220 49 55
e-mail gent@centexbel.be

CENTEXBEL BRUSSELS
Montoyerstraat 24-B2
BE-1000 Brussels
Tel. +32 2 287 08 30
Fax +32 2 230 68 15
e-mail brussel@centexbel.be

CENTEXBEL VERVIERS
Avenue du Parc 38
BE-4650 Herve (Chaineux)
Tel. +32 87 32 24 30
Fax +32 87 34 05 18
e-mail chaineux@centexbel.be



Addressee	our ref.	date	page number
Balta Industries nv - afdeling ITC	PW/10247	2010-11-16	2

Certification Report Nr. 10/10247 page 2

Related commercial names to this product group are:

ALTONA UX

OPTIMA UX

The obtained classification is based on the next test reports:


Centexbel: 74920 of 2010-08-10

Centexbel: 76367/B of 2010-10-29

Certificate valid until 2015-08-10

A handwritten signature in black ink, appearing to read "Petra Wittevrongel".

Petra Wittevrongel
certification coordinator

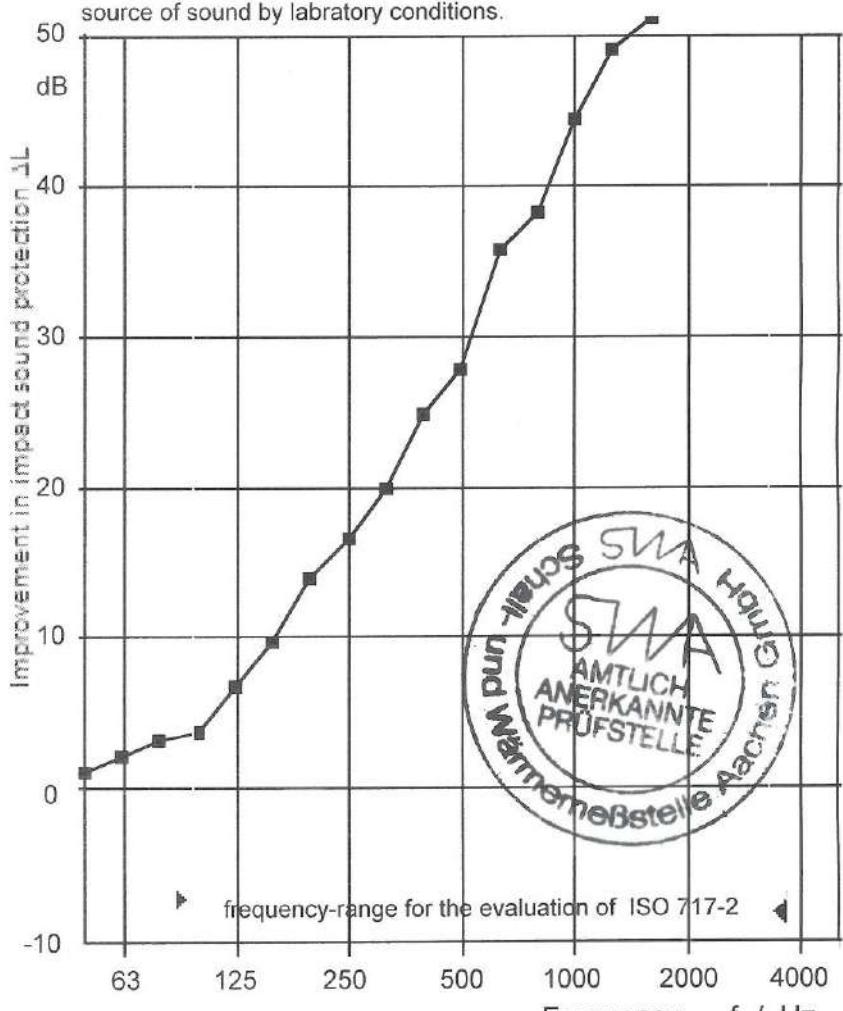Test results		Enclosure TS																																																																							
Impact sound insulation of ISO 140-8 : 1998 - 03		Page 2 of 2																																																																							
Measurement of impact sound insulation by a floor covering - on a solid strings-floor																																																																									
Customer: CENTEXBEL																																																																									
<p>Tested material: ALTONA UX (non glued) Test rooms: 02 u. K2, Hauptstraße 133, 52 477 Alsdorf Test area: 4,24 m x 4,15 m Test area of slab Date of test: 11.05.2010</p>																																																																									
Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on a 140 mm thick reinforced concrete floor slab																																																																									
Receiving room:		The results are based on tests, which were effected with an artificial source of sound by laboratory conditions.																																																																							
Volume:	58,9 m ³																																																																								
Temperature:	20 °C																																																																								
Humidity:	65 %																																																																								
<table border="1"> <thead> <tr> <th>Frequency</th> <th>L_n</th> <th>ΔL</th> </tr> </thead> <tbody> <tr><td>Bare floor</td><td></td><td></td></tr> <tr><td>Hz</td><td>dB</td><td>dB</td></tr> <tr><td>50</td><td></td><td>1,2</td></tr> <tr><td>63</td><td></td><td>2,3</td></tr> <tr><td>80</td><td></td><td>3,3</td></tr> <tr><td>100</td><td>61,0</td><td>3,8</td></tr> <tr><td>125</td><td>61,4</td><td>6,8</td></tr> <tr><td>160</td><td>64,8</td><td>9,9</td></tr> <tr><td>200</td><td>63,7</td><td>14,1</td></tr> <tr><td>250</td><td>65,4</td><td>16,7</td></tr> <tr><td>315</td><td>65,6</td><td>20,0</td></tr> <tr><td>400</td><td>66,1</td><td>24,9</td></tr> <tr><td>500</td><td>66,0</td><td>27,9</td></tr> <tr><td>630</td><td>66,4</td><td>35,8</td></tr> <tr><td>800</td><td>66,3</td><td>38,3</td></tr> <tr><td>1000</td><td>66,2</td><td>44,3</td></tr> <tr><td>1250</td><td>66,6</td><td>49,0</td></tr> <tr><td>1600</td><td>67,2</td><td>51,3</td></tr> <tr><td>2000</td><td>67,1</td><td>52,2</td></tr> <tr><td>2500</td><td>67,0</td><td>---</td></tr> <tr><td>3150</td><td>66,4</td><td>---</td></tr> <tr><td>4000</td><td>---</td><td>---</td></tr> <tr><td>5000</td><td>---</td><td>---</td></tr> </tbody> </table>		Frequency	L _n	ΔL	Bare floor			Hz	dB	dB	50		1,2	63		2,3	80		3,3	100	61,0	3,8	125	61,4	6,8	160	64,8	9,9	200	63,7	14,1	250	65,4	16,7	315	65,6	20,0	400	66,1	24,9	500	66,0	27,9	630	66,4	35,8	800	66,3	38,3	1000	66,2	44,3	1250	66,6	49,0	1600	67,2	51,3	2000	67,1	52,2	2500	67,0	---	3150	66,4	---	4000	---	---	5000	---	---
Frequency	L _n	ΔL																																																																							
Bare floor																																																																									
Hz	dB	dB																																																																							
50		1,2																																																																							
63		2,3																																																																							
80		3,3																																																																							
100	61,0	3,8																																																																							
125	61,4	6,8																																																																							
160	64,8	9,9																																																																							
200	63,7	14,1																																																																							
250	65,4	16,7																																																																							
315	65,6	20,0																																																																							
400	66,1	24,9																																																																							
500	66,0	27,9																																																																							
630	66,4	35,8																																																																							
800	66,3	38,3																																																																							
1000	66,2	44,3																																																																							
1250	66,6	49,0																																																																							
1600	67,2	51,3																																																																							
2000	67,1	52,2																																																																							
2500	67,0	---																																																																							
3150	66,4	---																																																																							
4000	---	---																																																																							
5000	---	---																																																																							
																																																																									
Reception filter: third-octave Calculation according ISO 717-2: Impact sound improvement index non rated reduction of impact sound insulation $C_{I,\Delta} = -13 \text{ dB}$ $\Delta L_w = 28 \text{ dB}$ $\Delta L_{lin} = \Delta L_w + C_{I,\Delta}$ $C_{I,r} = 2 \text{ dB}$ $(VM = 28 \text{ dB})$ $\Delta L_{lin} = 15 \text{ dB}$ $C_{I,r,50-2500} = 6 \text{ dB}$																																																																									
Test report no.: Aachen	CT110510A TS 28.05.2010	SWA Schall- und Wärmemessstelle Aachen GmbH (Dipl.-Ing. A. Siebel) (Dr.-Ing. L. Siebel)																																																																							

4.1 Valuation of test results

Enclosure SA

Soundabsorber for the application in buildings - valuation of sound absorbtion Sound absorption of DIN EN ISO 11654 : 1997- 07

Page 3 of 4

Customer: CENTEXBEL

Tested material: article: ALTONA UX (non glued)

Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf

Test area: 11,8 m²

Test method: method of reverberation room

Date of test: 11.05.2010


Description of the test material:

Total thickness: - mm

Mass / area: - kg/m²

laid loose on the floor of the reverberation room

frequency - range of the "shapeindi- cators"	Frequency in Hz	practical sound absorption coefficient
L	125	0,00
L	250	0,05
M	500	0,25
M	1000	0,45
H	2000	0,40
H	4000	0,50

Results: 

Relation - curve: 

Reverberation room:

Basic plan: trapezoid

Volume: 211 m³

Temperature: 20 °C


Humidity: 65 %

Surfaces areas of
reverberation
room:

213 m²

Surfaces areas of
reflectors in reverberation
room:

54,5 m²

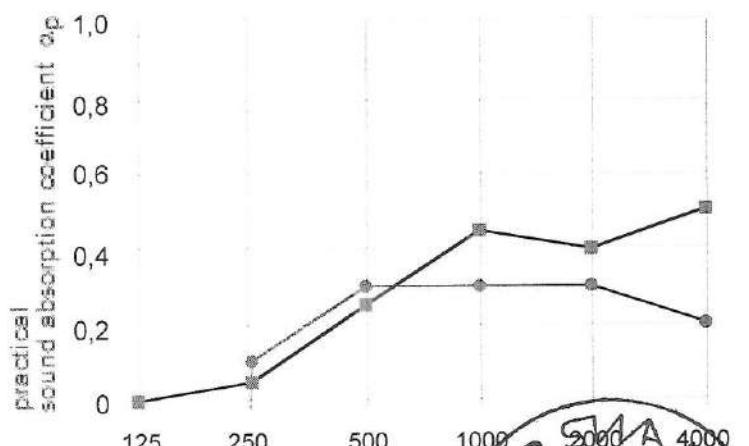

Evaluated sound absorptions grade by SWA

$\alpha_w : 0,30 \text{ (- - H) } ^*$

*) It is recommended insistently to use this singular valuation with complete
curve of sound absorption garde.



Test report no.:

CT110510A SA

A a c h e n

28.05.2010

SWA Schall- und Wärmemessstelle Aachen GmbH

(Dipl.-Ing. A. Siebel)

(Dr.-Ing. L. Siebel)

**HOMOLOGATION UPEC
MOQUETTES TOUFFETÉES ET TISSÉES EN LÉS**

Attestation n° 04/203

La Société BALTA Industries nv Division ITC
 Kanegemstraat 15
 B 8700 Tielt

Usine de Tielt (BE)


est autorisée à utiliser l'homologation **UPEC** conformément au référentiel Refhm.1 relatif aux moquettes touffetées et tissées en lés, pour le produit

ALTONA UX

Les caractéristiques du produit homologué figurent en page 2.

Le classement UPEC associé est : **U₃ P₃ E₁ C₀**

La présente attestation est valable à compter du 08/09/2004.

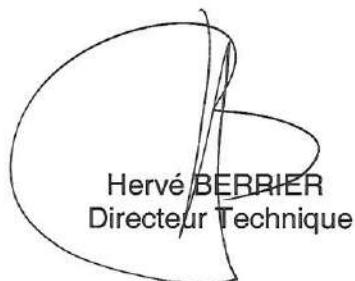

Cette attestation comporte 2 pages.

Correspondant : Danielle COUTANT
Tél. : 01 64 68 83 96
Fax : 01 64 68 84 76
E-mail : coutant@cstb.fr

Sauf annulation, suspension ou modification, cette attestation est valide.

La liste des produits homologués est tenue à jour au CSTB et disponible sur le site Internet www.cstb.fr.

HOMOLOGATION UPEC MOQUETTES TOUFFETÉES ET TISSÉES EN LÉS

Attestation n° 04/203

ALTONA UX

FABRICANT	BALTA Industries nv Division ITC
DISTRIBUTEUR	BALTA Industries nv
CLASSEMENT UPEC	U3 P3 E1 C0
Présentation :	
largeur des lés (m).....	4 & 5
Caractéristiques :	
Masse surfacique totale (g/m ²)	1670
Epaisseur totale (mm).....	8,6
Jauge de la machine.....	5/64"
Nbre de points au dm..... (sens transversal)	50
Nbre de points au dm..... (sens longitudinal)	80
Velours :	
Type.....	coupé
Coloris.....	unis
Nature.....	100% polyamide
Epaisseur utile (mm).....	4,8
Masse volumique (g/cm ³).....	0,095
Masse surfacique utile (g/m ²).....	450
Solidité des coloris :	
Lumière.....	≥ 5
Frottement à sec.....	≥ 4
Frottement humide.....	≥ 4
Dossier :	
Type	tissé
Nature.....	polypropylène
Masse surfacique (g/m ²)	100
Enduction :	
Nature.....	SBR
Masse surfacique (g/m ²)	700
Sous-couche :	
Type	feutre aiguilleté
Nature.....	polypropylène
Masse surfacique (g/m ²)	290
Masse volumique (g/cm ³).....	-
Epaisseur apparente (mm)	-
Pose :	
Mode de pose	collée
Types de colles préconisées.....	résines synthétiques (polyacrylique) en émulsion



ZERTIFIKAT

Genehmigung zur Nutzung des Prüfzeichens **MATERIALPRÜFUNG AUF ALLERGIKER-EIGNUNG**

Die

TÜV NORD Systems GmbH & Co. KG, Hamburg,

bestätigt, dass ausgewählte Artikel^{*)} der Teppichboden-Produktgruppen

- **Polyamid,**
- **Polyamid/Polypropylen und**
- **Polypropylen**

die von der TÜV NORD Systems GmbH & Co. KG gestellten Anforderungen erfüllen.

Der

BALTA INDUSTRIES NV, Sint-Baafs-Vijve (Belgien),

wird daher das Recht verliehen, das nachstehende Prüfzeichen im Zusammenhang mit den ausgewählten Artikeln der o. a. Teppichboden-Produktgruppen zu führen.

^{*)} siehe Rückseite

TÜV NORD Systems GmbH & Co. KG

Prüfstelle für Raumluftthygiene

Dipl.-Ing. M. Klein

Essen, 07. Oktober 2011



Für die nachfolgend aufgeführten Teppichboden-Artikel wurde der BALTA INDUSTRIES NV, Sint-Baafs-Vijve (Belgien) vom TÜV NORD, Hamburg, die Genehmigung erteilt, das TÜV NORD Prüfzeichen "Teppichboden aus allergenkontrolliertem Material – Für Allergiker geeignet" zu führen:

Teppichboden-Produktgruppe "Polyamid"

Chic UX, Elite UX, City Life UX, Angelo UX, Akzento TR, Chambord UX, Corsa UX, Figaro New UX, Forta TR, Parma V, Parma TR, Perugia UX, Preciosa UX, Preciosa TR, Richelieu TR, Sublimo UX, Rivoli TR, Altona UX, Corsa TR, Roxane UX, Quartier TR, Quartz TR, Rossini TR, Saphir TR, Henley Twist New TR, Elite TR, Ambiente UX, Harmony UX, Serenade UX, Linares UX, Yaris UX, Aktua UX, Namibia UX, Bellagio WT, Gerona WT, Apollo TR, Fortesse TR, Master TR, Mustang TR, Optima TR, Champion TR, Podium TR, Victory TR, Olympic TR, Platinum TR, Spontini TR, Cavalli TR, Altro TR, Prominent TR, Projecta TR, PJ + Name TR, Progressa TR, PG + Name TR, Promenade TR, PM + Name TR, Exclusivo WFB

Teppichboden-Produktgruppe "Polyamid / Polypropylen"

Coral UX, Star UX, Star TR, Forum UX, Robust UX, Tessuto UX, Tampa UTQ+, Tampa TR, Desert Twist TR, Desert Twist TF, Reggae TF, Tweed TR

Teppichboden-Produktgruppe "Polypropylen"

Casadesign UTQ+, Natura, Velvet Twist TF, Capitol Cable & Cord TF, Solid TR, Lounge TF, Stainsafe Heathers TR, Pure, Curly TF, Focus TF, Rasta TF, Shepherd Twist TR, Stainsafe Favourite Premium TR, Stainsafe Favourite Elite TR, Stainsafe Touch TR, Mistral TF, Passat TF, Scirocco TF, Scala TF, Scala Design TF, Salzburg TF, Sensations TR, Giro Gala TR, Giro Gala UTQ+